

## Korte handleiding Fourtec BluLite

### Specificaties BluLite:



- Temperatuurbereik: -20 tot 60 °C
- Vochtigheidsbereik : 0 tot 90 %
- Bluetooth Low Energy-connectiviteit
- Bluetooth-verbinding voor installatie, alarm en downloaden van gegevens
- Ondersteuning van Boomerang-functie voor het automatisch e-mailen van PDF-rapporten
- Meerdere activeringsmoden
- LCD-alarm en bemonsteringsindicatie
- 32K cyclisch samplegeheugen
- Gratis licentie om te gebruiken voor de DataSuite-software en de FourtecLite Android-app
- Stof- en waterbestendig, IP54


Download the FourtecLite Mobile App op je Android GSM:

<https://play.google.com/store/apps/details?id=com.fourtec.lite>

Software downloaden via :

<https://fourtec.com/products/blulite-bluetooth-logger-new/>

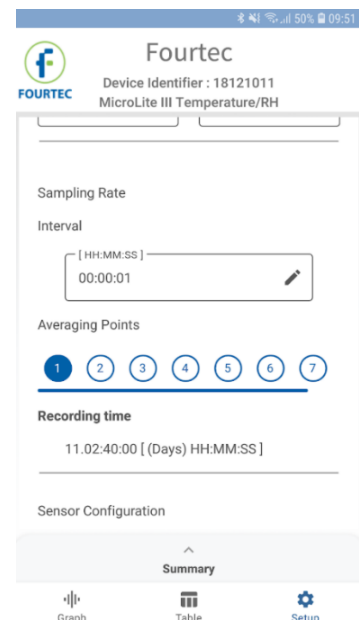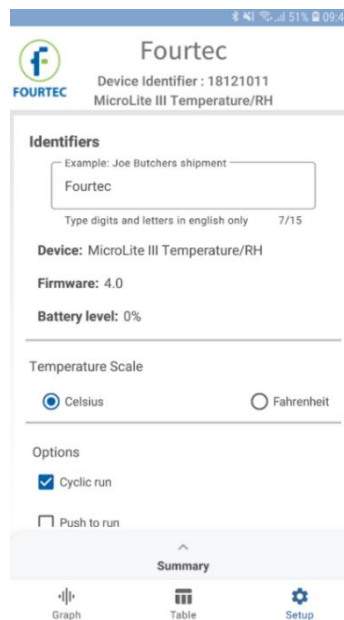

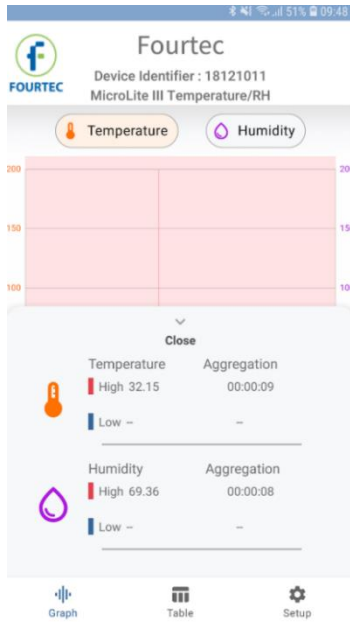

Fourtec  
Device Identifier : 18121011  
MicroLite III Temperature/RH

Time	Temperature	Internal Hum.
09:48:20	24.9	44.66
09:48:21	24.9	44.62
09:48:22	24.93	44.64
09:48:23	24.92	44.63
09:48:24	24.91	44.62
09:48:25	24.89	44.64
09:48:26	24.86	44.75
09:48:27	26.7	47.36
09:48:28	27.96	49.21
09:48:29	30.3	50.83
09:48:30	30.97	53.98
09:48:31	29.94	57.48
09:48:32	31.19	60.02
09:48:33	30.86	62.36
09:48:34	31.74	63.67

Summary

Graph Table Setup

Fourtec  
Device Identifier : 18121011  
MicroLite III Temperature/RH

Sensor Calibration Calibrate

Internal Temperature Calibration

Reference Value Logger Value

Point#1

Point#2


Revert

Internal Humidity Calibration

Reference Value Logger Value

Summary

Graph Table Setup

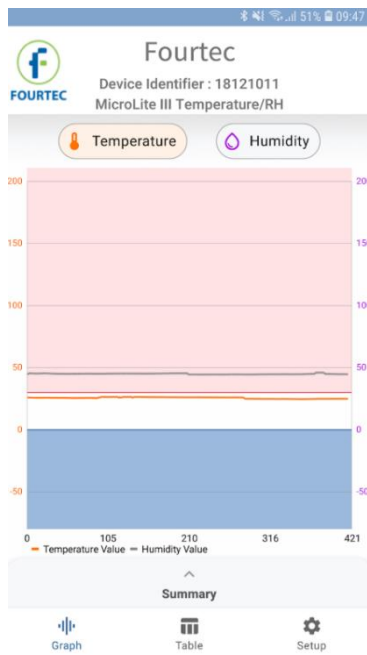

Fourtec  
Device Identifier : 18121011  
MicroLite III Temperature/RH

Identifiers

Example: Joe Butchers shipment

Fourtec

Type digits and letters in english only 7/15

Device: MicroLite III Temperature/RH

Firmware: 4.0

Battery level: 0%

Temperature Scale

Celsius  Fahrenheit

Options

Cyclic run

Push to run

Summary

Graph Table Setup